

# mixergy®

## Mixergy X - Indirect

120 | 150 | 180 | 210 | 250 | 300 | 400 | 500 Litres

Mixergy tanks are available as indirect or direct variants, and as vented or unvented systems. Our standard diameter tanks are available to suit the needs of most homes.

### Unique volumetric heating

Only heat what you need, saving money on hot water bills and reducing carbon

### Heat quicker

Delivers hot water up to 10x faster than conventional tanks

### Constant control

The Mixergy App and control gauge show you how much hot water you have available at any time



### Smart scheduling

Build a schedule that ensures you always have enough hot water available

### Voice control

Control your Mixergy tank through your Alexa or Google Home device

### Smart tariff ready


Use dynamic time-of-use tariffs to provide cheap hot water in off-peak periods

### Energy Savings

#### Trust verified

Independent verification that Mixergy tanks significantly reduce gas consumption, saving up to 21% on hot water bills

**HEAT WHAT  
YOU NEED**



Indirect tanks are designed for use with gas or oil boilers, available as either a vented or unvented system



Heat pump ready, so you can easily connect to all makes and models of heat pump in the future



3kW Incoloy immersion heater for direct electric back-up and integration with smart electricity tariffs and solar PV





Easy connection to solar PV - either on installation or in the future

TECHNICAL DATA

Model	120L	150L	180L	210L	250L	300L	400L	500L
Product code	MX-120-IND-549	MX-150-IND-549	MX-180-IND-549	MX-210-IND-549	MX-250-IND-549	MX-300-IND-549	MX-400-IND-709	MX-500-IND-709
Nominal capacity (litres)	120	150	170	210	250	300	400	500
ErP rating	B	B	B	B	C	C	C	C
Insulation thickness (mm)	50	50	50	50	50	50	50	50
Connection size/type	22mm/comp.	22mm/comp.	22mm/comp.	22mm/comp.	22mm/comp.	22mm/comp.	1"F/threaded	1"F/threaded
Immersion heater rating (kW)	3	3	3	3	3	3	3	3
Height (mm)	888	1075	1203	1389	1701	1924	1613	1975
Diameter (mm)	545	545	545	545	545	545	690	690
Weight empty (kg)	35	38	42	45	51	55	86	102
Weight full (kg) *	155	188	212	255	301	355	486	602
Coil rating (kW)	17.8	18.3	19.4	19.9	20.7	23.6	27.6	28.5
Standing heat loss ** (kWh/24h)	0.68-1.06	0.68-1.22	0.68-1.34	0.68-1.44	0.68-1.75	0.68-2.04	0.97-2.21	0.97-2.42
Standing loss (W)	44	51	56	60	73	85	92	101
Minimum reheat time (15-65 °C)	9 mins	11 mins	11 mins	12 mins	12 mins	12 mins	13 mins	15 mins
25% charge reheat time (15-65 °C)	9 mins	11 mins	11 mins	12 mins	12 mins	12 mins	13 mins	15 mins
70% charge reheat time (15-65 °C)	17 mins	20 mins	22 mins	26 mins	30 mins	31 mins	36 mins	43 mins
100% charge reheat time (15-65 °C)	24 mins	29 mins	31 mins	37 mins	42 mins	44 mins	51 mins	61 mins

\* For cylinders with external heat exchanger fitted, add 5kg to the full cylinder weight. \*\* Lower value represents losses at 25% total volume heated and upper value is used for SAP

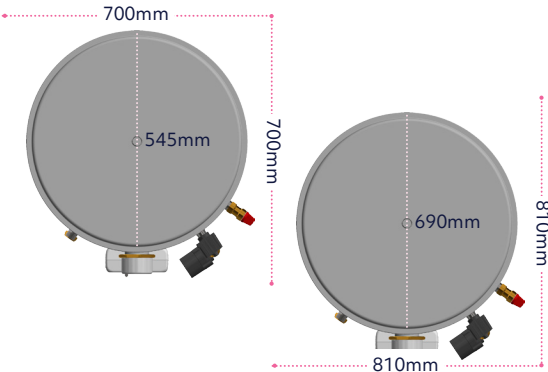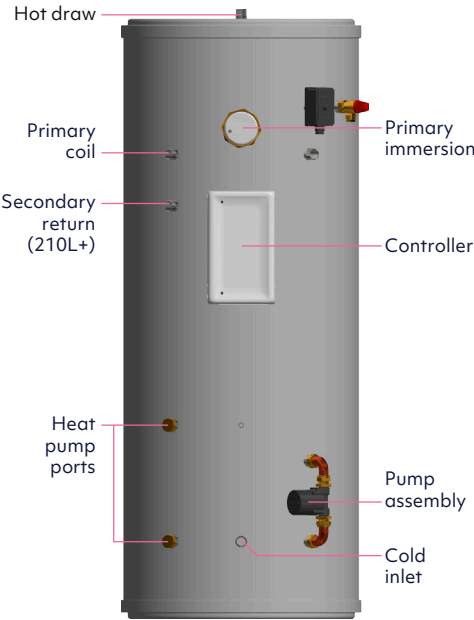

HERE  
TO HELP

For further information or  
technical assistance  
01865 884343  
enquiries@mixergy.co.uk  
www.mixergy.co.uk

- The following components are supplied as standard:
- Unvented kit: pressure reducing valve, check valve, pressure & temperature relief valve, expansion relief valve, tundish and expansion vessel (including mounting bracket and 3/4" x 22mm adapters)
  - 3 kW immersion heater(s) 1.3/4" BSP (fitted)
  - High limit thermostat
  - 2-port diverter valve V4043H1056
  - Powerline to Ethernet adapter
  - Ethernet cable
  - Control gauge
  - User Guide

mixergy®

www.mixergy.co.uk



Mixergy Ltd, 2 Canal View, Wharf Farm,  
Eynsham Road, Cassington, Oxfordshire OX29 4DB